

**Electrical Motor Controller 150 kW  
EVI160A**






**Main Features**

- Dedicated to permanent magnet motor
- 3-phase inverter with IGBTs
- Max input voltage: 450 VDC
- Motor current rms: 350A (605 A / 30 sec.)
- Power : 150kW (200kW / 30s)
- Torque or speed control
- Control & Monitoring: CAN2.0 bus
- Water cooling
- Waterproof case IP65
- Advanced control algorithm for optimal power management and efficiency
- Braking recovery management
- Bootloader for field upgradeable firmware
- Position sensor : Multiple possibilities (SinCos by default)

**Applications**

- Test bench
- Calibration
- Reverse engineering
- Embedded systems

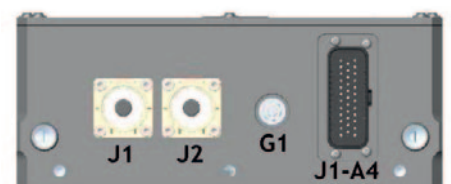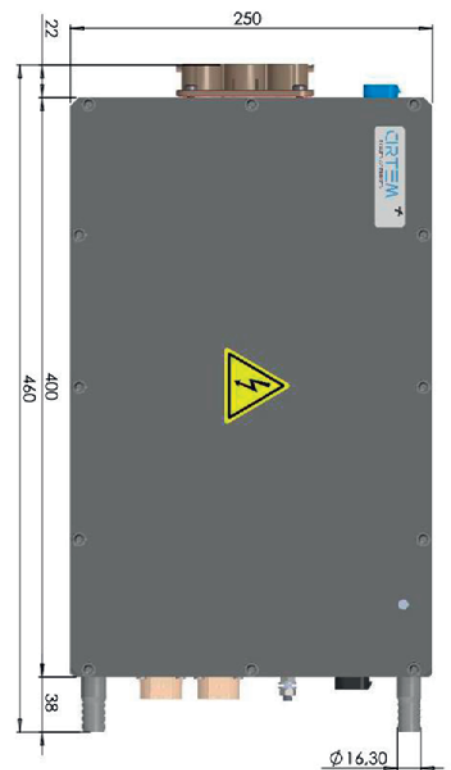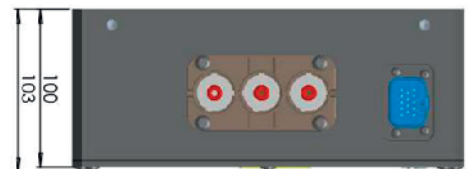

## Technical data

### GENERAL

Weight	15 kg
Volume	10 L (without connectors)
Sealing	IP65
Fixing	12 holes M8
Housing	Aluminium

### ELECTRICAL CHARACTERISTICS

Maximum input voltage	450 Vdc
Maximum motor current RMS	350 A continuous, 605 A for 30 sec. (Depending on switching frequency)
Maximum electrical frequency	1000 Hz
Efficiency	>95%
Auxiliary power supply	10 V to 16 V – 45 W
Insulation	2500 V – 50 Hz – 60 s

### ENVIRONMENTAL AND COOLING FEATURES

Operating temperature range	-20 to +85°C
Storage temperature range	-40 to +85°C
Coolant	50 / 50 EGW
Maximum liquid temperature	80°C, current derating from 70°C to 80°C
Minimum coolant flow	10L / min
Coolant pressure drop	0,1 bar @ 10L / min & 0,4 bar @ 20L/min

## Connections

- 2 Powerlock connectors with 95 mm<sup>2</sup> cables to the battery
- 3 Powerlock connectors with 95 mm<sup>2</sup> cables to the motor
- 2 cooling pipes (outside diameter 16 mm)
- 1 connector for the engine interface
- 1 connector for the supervisor interface

## Vibrations & shocks standards

- Vibration on all three axes - 24 or 75 hours per axis @ speed 1 Hz / s: sine sweep from 10 to 21 Hz → 10 mm peak-to-peak movement, sine sweep from 21 Hz to 1.5 kHz → acceleration 90 m / s<sup>2</sup>, sine sweep from 1.5 Hz to 3 kHz → acceleration 30 m/s<sup>2</sup>
- Shocks: 6x10 positive and negative mechanical shocks on the three axes of 25g 11 ms half sine
- Standards: CISPR25 - Class 1, ISO 16750-3 "Mechanical vibration", IEC 60068-2-27, ISO 16750-3 "Mechanical shock" and IEC 60068-2-27

## Safety

- Short circuit of the motor in the event of a fault (to avoid the return of power in the battery and braking)
- Overcurrent protection (motor and battery)
- Thermal protection (motor and inverter)
- Auxiliary power monitoring
- CAN bus malfunction



At CIRTEM we create, develop and manufacture innovative power converters for optimized electrical systems.

Through our renowned technological research, our high end engineering and our high skill production sized for growing markets, CIRTEM is your OEM partner from the concept to commercial success !



Electromobility



Defence



Electricals grids



Industry

4, avenue Louis Blériot  
Z.A. Val de Saune  
31570 Ste Foy d'Aigrefeuille - France

+33 562 242 600

info@cirtem.com

www.cirtem.com